





Elmo Rietschle

G-BH1

Data sheet 2BH1 400


Side channel blower

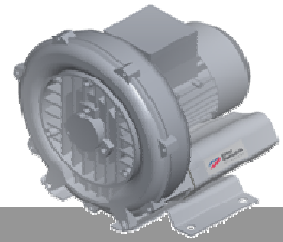

Performance curves

Vacuum operation (acfm)

Pressure operation (scfm)

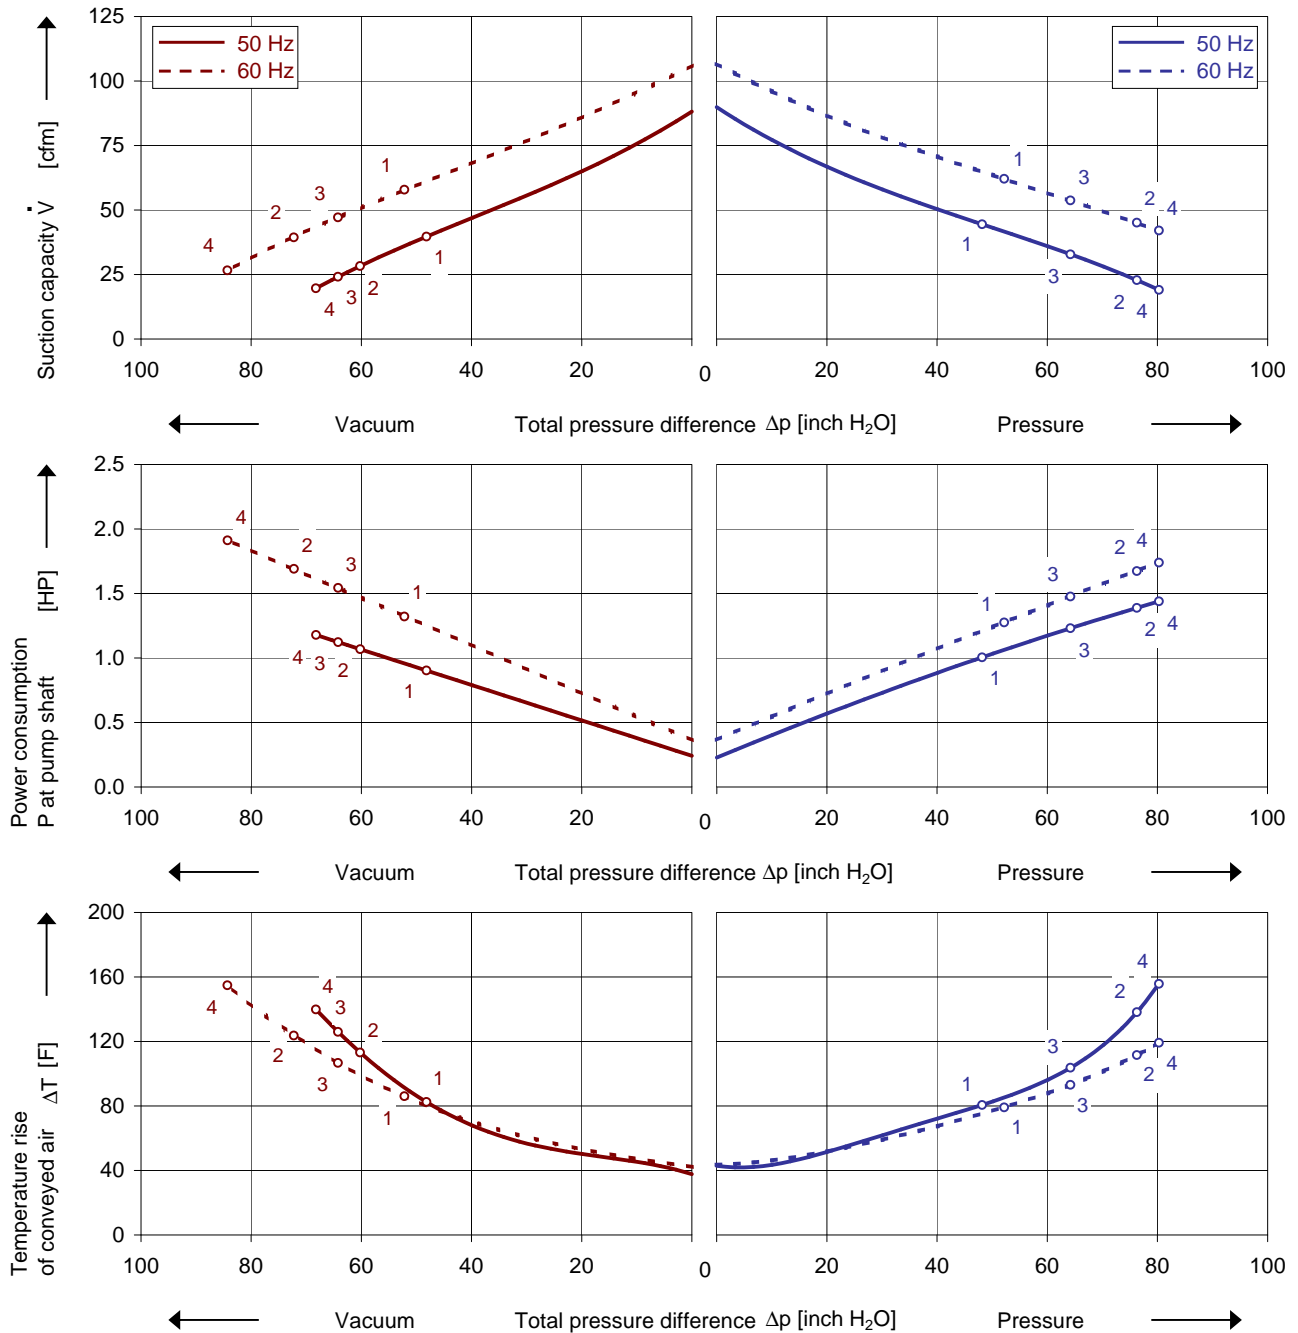

The performance curves are based on air at a temperature of 59 F and an atmospheric pressure of 29.91 inch Hg with a tolerance of ± 10 %. The total pressure differences are valid for inlet and ambient temperature up to 77 F. Suction capacity relates to inlet conditions. Pressure capacity relates to atmospheric conditions. For other conditions please get in touch with us.

Every G-BH blower can be used either for vacuum or pressure in continuous operation over the total performance curve range. The motors are available as standard in protection category IP 55 and insulation class F. These blowers are UL and CSA approved.

Selection and ordering data

Type 2BH1 400

No.	Fre- quency	Rated			Max. differential pressure ²⁾		Sound pressure level ³⁾	Weight Approx.	Order No.
		Voltage ¹⁾	Current	Power	Vacuum	Pressure			
		Hz	V	A	HP				
3~ 50/60 Hz, IP55, Insulation material class F, UL 507 and CSA 22.2 No 113 (certificate number E225239)									
1	50	200-240 Δ / 345-415 Y	3.8 Δ / 2.2 Y	0.94	-48	48	63	29	2BH1400-7AH06
	60	220-275 Δ / 380-480 Y	3.8 Δ / 2.15 Y	1.1	-52	52	64		
3	50	200-240 Δ / 345-415 Y	4.2 Δ / 2.4 Y	1.1	-64	64	63	35	2BH1400-7AH16
	60	220-275 Δ / 380-480 Y	4.0 Δ / 2.3 Y	1.3	-64	64	64		
4	50	200-240 Δ / 345-415 Y	5.7 Δ / 3.3 Y	1.7	-68	80	63	42	2BH1400-7AH26
	60	220-275 Δ / 380-480 Y	5.7 Δ / 3.3 Y	2.0	-84	80	64		
3~ 50/60 Hz, IP55, Insulation material class F, UL 507 and CSA 22.2 No 113 (certificate number E225239)									
1	50	500 Y	1.88 Y	0.94	-48	48	63	29	2BH1400-7AC03
	60	575 Y	1.76 Y	1.1	-52	52	64		
3	50	500 Y	1.9 Y	1.1	-64	64	63	35	2BH1400-7AC13
	60	575 Y	1.95 Y	1.3	-64	64	64		
4	50	500 Y	2.65 Y	1.5	-68	80	63	42	2BH1400-7AC23
	60	575 Y	2.6 Y	2.0	-84	80	64		
1~ 50/60 Hz, IP55, Insulation material class F, UL 507 and CSA 22.2 No 113 (certificate number E225239), with attached capacitor for cont. operation									
2	50	115 / 230	13.0 / 6.5	1.5	-60	76	63	37	2BH1400-7AV25
	60	115 / 230	14.0 / 7.0	1.7	-72	76	64		

1) In case of frequency converter operation the standard motor insulation system is suitable for converter input voltages up to 460 V.

2) Relief valves available for limiting differential pressure.

3) Measuring surface sound pressure level acc. to EN ISO 3744, measured with an equivalent unit at a distance of 1 m. The pump is throttled to an average suction pressure, with piping connected, but no relief valves fitted, tolerance ±3 dB (A).


All G-BH match the 2006/42/EC (machinery) and 2006/95/EC (low voltage) directives and the EN 60034-1 norm "Rotating electrical machines".

The motors comply with EN 60 034-1 / -2 / -30 (IEC 60034) and thermal class F.

For three phase motors tolerances are +/-10% for fixed voltage motors and +/-5% for voltage range motors. Single phase machines are designed with a +/- 5% tolerance.

The frequency tolerance is +/- 2 % maximum.

Motors for other mains

Voltage range		Fixed voltage		VFD	c  us	
50 Hz	60 Hz	50 Hz	60 Hz	87 Hz	60 Hz	2BH1400-7. <input type="checkbox"/> <input type="checkbox"/>
					Δ Y	
3~						
185 - 225 V Δ / 320 - 390 V Y	200 - 240 V Δ / 345 - 415 V Y			380 V Δ	• •	H 1
200 - 240 V Δ / 345 - 415 V Y	220 - 275 V Δ / 380 - 480 V Y				• •	H 6
345 - 415 V Δ / 600 - 720 V Y	380 - 480 V Δ / 660 - 720 V Y				• •	H 7
		500 V Y	575 V Y		• •	H 3
		500 V Δ	575 V Δ		• •	C 5
3~						
IE2 3~ ⁵⁾						
180 - 240 V Δ / 310 - 415 V Y	200 - 275 V Δ / 345 - 480 V Y	200 V Δ / 345 V Y	230 V Δ / 400 V Y	400 V Δ	• •	P 1
450 - 550 V Δ	520 - 600 V Δ	500 V Y	575 V Y		• •	P 3
200 - 260 V Δ / 350 - 450 V Y	230 - 290 V Δ / 400 - 500 V Y	500 V Δ	575 V Δ		• •	P 5
350 - 450 V Δ / 610 - 725 V Y	400 - 500 V Δ / 690 - 725 V Y	230 V Δ / 400 V Y	265 V Δ / 460 V Y		• •	P 6
		400 V Δ / 690 V Y	460 V Δ		• •	P 7

5) Performance can differ if IE2 motors are used. Please refer to corresponding data sheets.

Changes in particular of the quoted performance curve, data and weights may occur without prior notice. The data given do not constitute an obligation from our side to deliver as shown.

Elmo Rietschle is a brand of Gardner Denver

**Gardner
Denver**

Your Ultimate Source for Vacuum and Pressure

Gardner Denver Deutschland GmbH

Industriestraße 26
97616 Bad Neustadt - Germany
Tel.: +49 9771 6888-0
Fax: +49 9771 6888-4000

www.gd-elmoietschle.com • er.de@gardnerdenver.com

Gardner Denver, Inc.

1800 Gardner Expressway
Quincy, IL 62305
Tel: 217-222-5400
Fax: 217-221-8780