

## G-BH2 e

### Data sheet 2BH2 0360-1

Side channel blower with Frequency Converter


**IE2**



#### Performance curves

##### Vacuum operation

##### Compressor operation

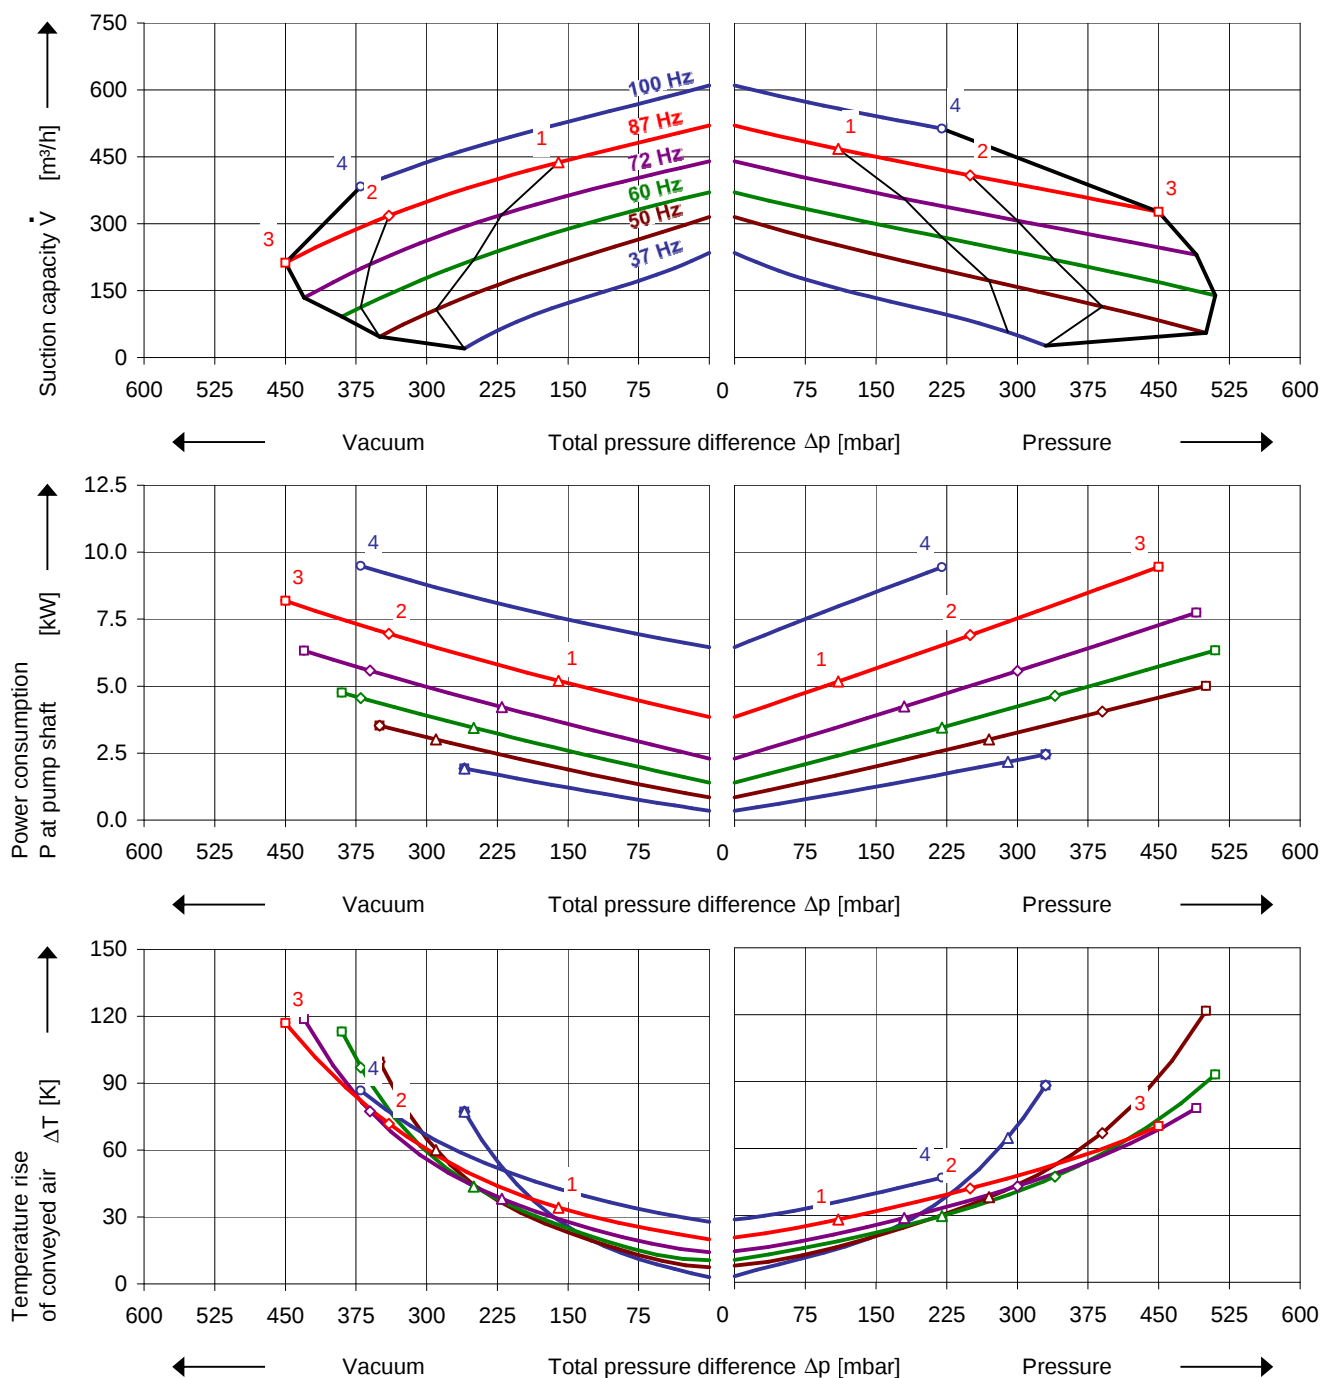

The performance curves are based on air at a temperature of 15 °C and a atmospheric pressure of 1013 mbar with a tolerance of  $\pm 10$  %. The total pressure differences are valid for suction and ambient temperature up to 25 °C. For other conditions please get in touch with us.

The performance curves are based on frequency converter operation and a pulse frequency of 4 kHz minimum. Rated voltage/frequency set point is 345 V / 87 Hz and delta connection of motor. Frequency converters must be connected to a mains voltage of 380 V minimum.

| Selection and ordering data                                                                             |                |             |         |       |                                             |          |                                       |                   |                                  |          |   |
|---------------------------------------------------------------------------------------------------------|----------------|-------------|---------|-------|---------------------------------------------|----------|---------------------------------------|-------------------|----------------------------------|----------|---|
| Type 2BH2 0360-1                                                                                        |                |             |         |       |                                             |          |                                       |                   |                                  |          |   |
| No.                                                                                                     | Fre-<br>quency | Rated motor |         |       | Max. differential<br>pressure <sup>1)</sup> |          | Sound pressure<br>level <sup>2)</sup> | Weight<br>Approx. | Order No.                        | VFD type |   |
|                                                                                                         |                | Voltage     | Current | Power | Vacuum                                      | Pressure |                                       |                   |                                  |          |   |
|                                                                                                         | Hz             | V           | A       | kW    | mbar                                        |          | dB(A)                                 | kg                |                                  |          |   |
| Integrated VFD 3~ 400V -15% ... 480V +10%, 50/60 Hz ±6% with IE2 motor with thermistor (PTC), IP55      |                |             |         |       |                                             |          |                                       |                   |                                  |          |   |
| 2                                                                                                       | 87             | 345 Δ       | 15.1 Δ  | 6.9   | -340                                        | 250      |                                       | 78                | 2BH20360-1AA2L1-AA               |          | F |
| 3                                                                                                       | 87             | 345 Δ       | 20.5 Δ  | 9.5   | -450                                        | 450      | 83                                    | 126               | 2BH20360-1AA2M1-AA               | G        |   |
| 3~ 50/60 Hz, IP55, Insulation material class F, UL 507 and CSA 22.2 No 113 (certificate number E225239) |                |             |         |       |                                             |          |                                       |                   |                                  |          |   |
| 1                                                                                                       | 50             | 345 Y       | 6.7 Y   | 3.0   | -290                                        | 270      | 65                                    | 54                | 2BH20360-1AAPK1-AA <sup>3)</sup> | C        |   |
|                                                                                                         | 60             | 400 Y       | 6.5 Y   | 3.45  | -250                                        | 220      | 69                                    |                   |                                  | C        |   |
|                                                                                                         | 87             | 345 Δ       | 11.6 Δ  | 5.2   | -160                                        | 110      | 70                                    |                   |                                  | E        |   |
| 2                                                                                                       | 50             | 345 Y       | 8.8 Y   | 4.0   | -350                                        | 390      | 66                                    | 66                | 2BH20360-1AAPL1-AA <sup>3)</sup> | D        |   |
|                                                                                                         | 60             | 400 Y       | 8.4 Y   | 4.55  | -370                                        | 340      | 70                                    |                   |                                  | D        |   |
|                                                                                                         | 87             | 345 Δ       | 15.1 Δ  | 6.9   | -340                                        | 250      | 82                                    |                   |                                  | F        |   |
| 4                                                                                                       | 50             | 345 Y       | 11.8 Y  | 5.5   | -350                                        | 500      | 70                                    | 77                | 2BH20360-1AAPM1-AA <sup>3)</sup> | E        |   |
|                                                                                                         | 60             | 400 Y       | 11.4 Y  | 6.3   | -390                                        | 510      | 70                                    |                   |                                  | E        |   |
|                                                                                                         | 100            | 345 Δ       | 20.0 Δ  | 9.5   | -370                                        | 220      | 83                                    |                   |                                  | E        |   |

- 1) We recommend differential pressure indicators / switches for limiting differential pressure. Relief valves are only useable at defined frequency.
- 2) Measuring surface sound pressure level acc. to EN ISO 3744, measured with an equivalent unit at a distance of 1 m. The pump is throttled to an average suction pressure, with piping connected, but no relief valves fitted, tolerance ±3 dB (A).
- 3) PTC recommended for motor overload protection. Ordering example: 2BH20360-1 □□□□-□□-Z Z=A11

All G-BH match the 2006/42/EC (machinery) and 2006/95/EC (low voltage) directives and the EN 60034-1 norm "Rotating electrical machines".  
The motors comply with EN 60 034-1 / -2 / -30 (IEC 60034) and thermal class F.

| Frequency converter (IP55) motor integrated / for wall mounting        |                 |                        |                       |                        |                        |                 |                                                                                            |                              |
|------------------------------------------------------------------------|-----------------|------------------------|-----------------------|------------------------|------------------------|-----------------|--------------------------------------------------------------------------------------------|------------------------------|
| Frequency Converter                                                    |                 | Rated mains<br>voltage | Max. motor<br>current | Typical motor<br>power | Rated mains<br>current | Fuse Protection | Weight<br>Approx.                                                                          | Adaptor for wall<br>mounting |
| Order No.                                                              |                 | V                      | A                     | kW                     | A                      | A               | kg                                                                                         | Order No.                    |
| C                                                                      | 2FC4302-1 □□ 00 | 400V (-15%)            | 7.5                   | 3.0                    | 6.2                    | 16              | 5.0                                                                                        | 2FX16490ER00                 |
| D                                                                      | 2FC4402-1 □□ 00 |                        | 9.5                   | 4.0                    | 7.9                    | 16              |                                                                                            |                              |
| E                                                                      | 2FC4552-1 □□ 00 | ...<br>480V (+10%)     | 13.0                  | 5.5                    | 10.8                   | 20              | 8.7                                                                                        | 2FX16690ER00                 |
| F                                                                      | 2FC4752-1 □□ 00 |                        | 17.8                  | 7.5                    | 14.8                   | 25              |                                                                                            |                              |
| G                                                                      | 2FC4113-1 □□ 00 |                        | 28.0                  | 11.0                   | 23.3                   | 35              | 21.0                                                                                       | 2FX16990ER00                 |
| I/O's and automation                                                   |                 |                        |                       |                        |                        | Order option    | Example:                                                                                   |                              |
| ST 2 AIN / 2 AOUT / 4 DIGIN / 1 DIGOUT / 2 RELAYS                      |                 |                        |                       |                        |                        | STANDARD        | 2BH20360-1AA2L1-AA-Z Z=U51<br><br>VFD type 2FC4752-1PB00 to be delivered already installed |                              |
| PB 2 AIN / 2 AOUT / 4 DIGIN / 1 DIGOUT / 2 RELAYS / ProfiBus interface |                 |                        |                       |                        |                        | Z = U51         |                                                                                            |                              |
| CB 2 AIN / 2 AOUT / 4 DIGIN / 1 DIGOUT / 2 RELAYS / CANopen interface  |                 |                        |                       |                        |                        | Z = U52         |                                                                                            |                              |
| PN 2 AIN / 2 AOUT / 4 DIGIN / 1 DIGOUT / 2 RELAYS / ProfiNet interface |                 |                        |                       |                        |                        | Z = U53         |                                                                                            |                              |
| SC 2 AIN / 2 AOUT / 4 DIGIN / 1 DIGOUT / 2 RELAYS / SERCOS3 interface  |                 |                        |                       |                        |                        | Z = U54         |                                                                                            |                              |

| VFD accessories                                                                                                                  |               |                                    |               |
|----------------------------------------------------------------------------------------------------------------------------------|---------------|------------------------------------|---------------|
| Item                                                                                                                             | Order No.     | Item                               | Order No.     |
| Manual control                                                                                                                   |               | Differential pressure transmitters |               |
| MMI handheld                                                                                                                     | 2FX4520-0ER00 | Vacuum -1000 ... 0 mbar            | 2FX6022-0BD00 |
| USB adaptor cable                                                                                                                | 2FX4521-0ER00 | Pressure 0 ... 600 mbar            | 2FX6013-0BD00 |
|                                                                                                                                  |               | 0 ... 1000 mbar                    | 2FX6014-0BD00 |
| INVERTERpc Software                                                                                                              |               |                                    |               |
| Free download at <a href="http://www.gd-elmoietschle.com">www.gd-elmoietschle.com</a> >Downloads >Product Documents >Accessories |               |                                    |               |

Changes in particular of the quoted performance curve, data and weights may occur without prior notice. The data given do not constitute an obligation from our side to deliver as shown.

Elmo Rietschle is a brand of Gardner Denver

**Gardner  
Denver**

Your Ultimate Source for Vacuum and Pressure

Gardner Denver Deutschland GmbH

Industriestraße 26  
97616 Bad Neustadt - Germany  
Tel.: +49 9771 6888-0  
Fax: +49 9771 6888-4000

[www.gd-elmoietschle.com](http://www.gd-elmoietschle.com) • [er.de@gardnerdenver.com](mailto:er.de@gardnerdenver.com)

Gardner Denver Schopfheim GmbH

Roggenbachstraße 58  
79650 Schopfheim - Germany  
Tel.: +49 7622 392-0  
Fax: +49 7622 392-300