

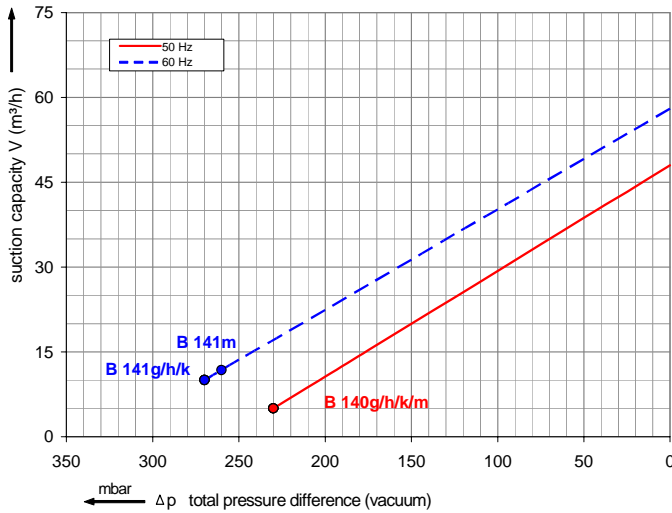
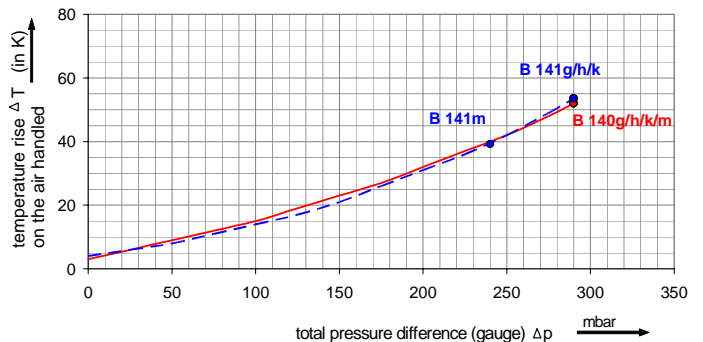
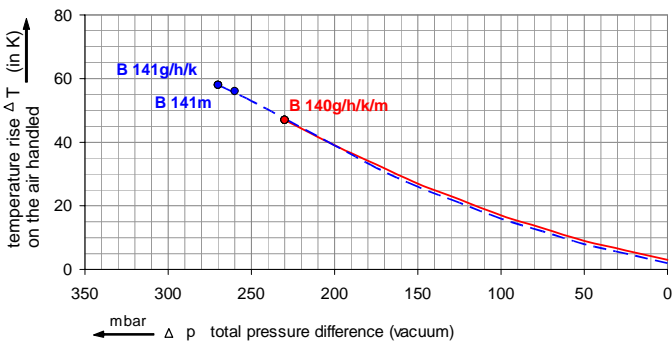
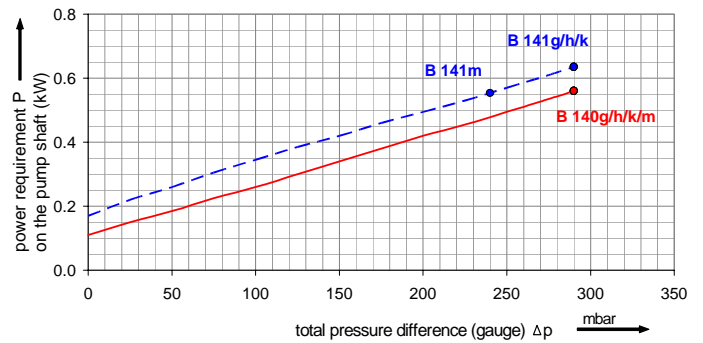


G-BH7

Performance curve for Vacuum pump

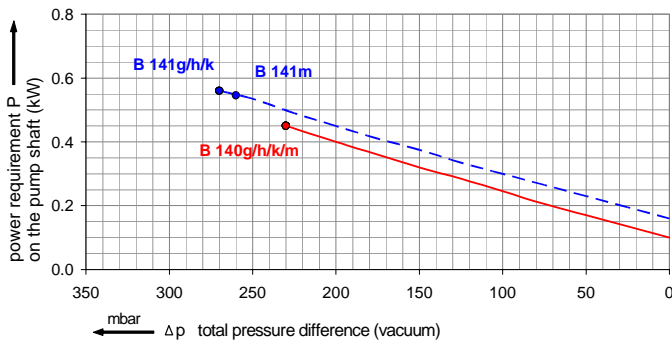

Performance curve for Compressor

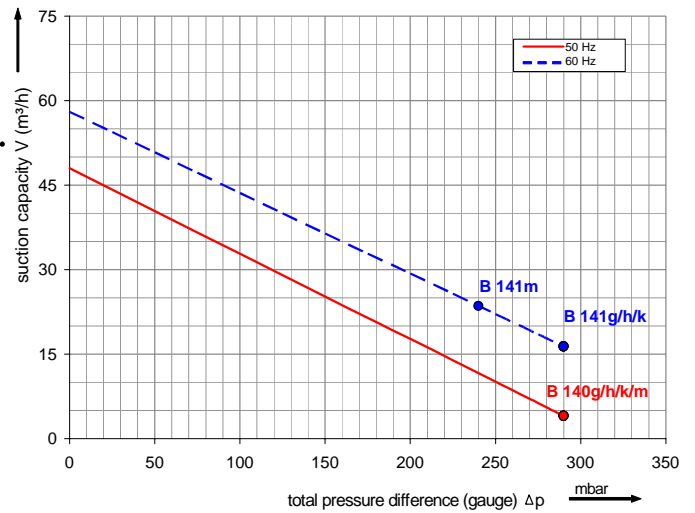

The performance curves are based on air at a temperature of 15 °C and an atmospheric pressure of 1013 mbar with a tolerance of +/- 10 %.
The total pressure differences are valid for suction and ambient temperatures up to 25 °C.
For other conditions please confer with us.

Each G-BH7 type can be applied both as vacuum pump and compressor in continuous operation over the total stated performance curve range. Blowers with ATEX 94/9 EG are available for the category 3D, 3G, 3/2D as well as 3/2G. The motors are available as standard for the input voltage of 50 and 60 Hz and for protection category IP 55 (IP 65 for category 3/2D). For the category 3/2G are only available blowers with the input voltage 50 and 60 Hz, respectively.

Selection and ordering data

Type 2BH7 210

| Curve No. | Order No. | Frequency | Rated power | Input voltage | Input current | Permissible total differential pressure ²⁾ | | Sound pressure level ³⁾ | Weight ca. |
|-----------|-----------|-----------|-------------|---------------|---------------|---|-----------------|------------------------------------|------------|
| | | | | | | Vacuum mbar | Compressor mbar | | |
| | | Hz | kW | V | A | | | dB(A) | kg |

ATEX-Category: 3D (Order-Option M35)

3- 50/60 Hz, IP55, insulation material class F, temperature class T3

| | | | | | | | | | | | |
|--------|-------------------|----|------|------|------|-------|-------|------|-----|----|----|
| B 140g | 2BH7210-0AD11-7-Z | 50 | 0.55 | 230D | 400Y | 2.36D | 1.36Y | -230 | 290 | 57 | 16 |
| B 141g | 2BH7210-0AD11-7-Z | 60 | 0.63 | | 460Y | | 1.36Y | -270 | 290 | 62 | 16 |

ATEX-Category: 3G (Order-Option: M72)

3- 50/60 Hz, IP55, insulation material class F, temperature class T3

| | | | | | | | | | | | |
|--------|-------------------|----|------|------|------|-------|-------|------|-----|----|----|
| B 140h | 2BH7210-0AD11-7-Z | 50 | 0.55 | 230D | 400Y | 2.36D | 1.36Y | -230 | 290 | 57 | 16 |
| B 141h | 2BH7210-0AD11-7-Z | 60 | 0.63 | | 460Y | | 1.36Y | -270 | 290 | 62 | 16 |

ATEX-Category: 3/2D (Order-Option: M34)

3- 50/60 Hz, IP65, insulation material class F, temperature class T3

| | | | | | | | | | | | |
|--------|-------------------|----|------|------|------|-------|-------|------|-----|----|----|
| B 140k | 2BH7210-0AD11-7-Z | 50 | 0.55 | 230D | 400Y | 2.36D | 1.36Y | -230 | 290 | 57 | 16 |
| B 141k | 2BH7210-0AD11-7-Z | 60 | 0.63 | | 460Y | | 1.36Y | -270 | 290 | 62 | 16 |


ATEX-Category: 3/2G (Order-Option: M71)

3- 50 Hz, IP55, insulation material class F, temperature class T3

| | | | | | | | | | | | |
|--------|-------------------|----|------|------|------|-------|-------|------|-----|----|----|
| B 140m | 2BH7210-0AD11-7-Z | 50 | 0.55 | 230D | 400Y | 2.43D | 1.4 Y | -230 | 290 | 57 | 17 |
|--------|-------------------|----|------|------|------|-------|-------|------|-----|----|----|

3- 60 Hz, IP55, insulation material class F, temperature class T3

| | | | | | | | | | | | |
|--------|-------------------|----|------|--|------|--|-------|------|-----|----|----|
| B 141m | 2BH7210-0AG11-7-Z | 60 | 0.55 | | 460Y | | 1.27Y | -260 | 240 | 62 | 17 |
|--------|-------------------|----|------|--|------|--|-------|------|-----|----|----|

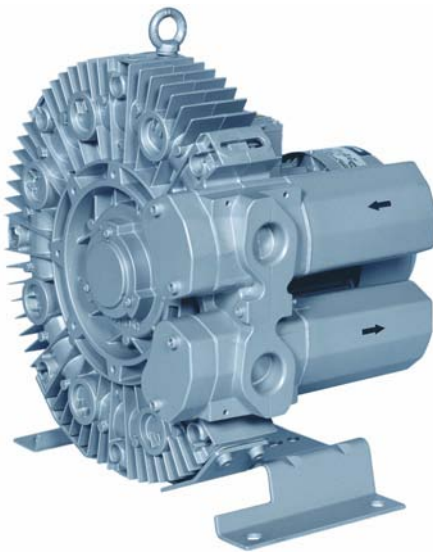

Other voltage ranges

2BH7210-0A □ . □ -Z

50Hz 60Hz



3- ATEX

Category 3D, 3G and 3/2D

| | | |
|-------------------|---------|-----|
| 230 V D / 400 V Y | 460 V Y | D 1 |
| 500 V D | 575 V D | D 5 |
| 400 V D / 690 V Y | 460 V D | D 6 |

Category 3/2G

| | | |
|-------------------|---------|-----|
| 230 V D / 400 V Y | --- | D 1 |
| 500 V D | --- | D 5 |
| 400 V D / 690 V Y | --- | D 6 |
| --- | 460 V Y | G 1 |
| --- | 575 V D | G 5 |
| --- | 460 V D | G 6 |

Further voltage range on request; please quote in plain text.

All G-BH7 achieve the standards and norms of the low voltage directive 72/23/EWG, rotating electrotechnical motor EN 60034-1-34, electromagnetic compatibility (EMC) DIN EN 61000-3-6/-4.

- ²⁾ Relief-valve are available for limiting differential pressure.
- ³⁾ Measuring-surface sound-pressure level acc. to DIN EN 21680, measured at a distance of 1 m. The pump is throttled to an average suction pressure, a hose is connected to the discharge side (vacuum pump) / suction side (compressor), but is not fitted with relief valves.

The motors are designed according to the DIN EN 60 034 / DIN IEC 34-1 and temperature class F.

For the three phase machines the tolerances are +/- 10 % for fixed voltage. The frequency tolerance is maximum +/- 2 %.

Changes in particular the quoted performance curve, datas and weights without prior notice. The figures are without obligations.

Gardner Denver

Elmo Rietschle is a brand of the
Gardner Denver Blower Division

info@de.gardnerdenver.com
www.gd-elmorietschle.com

Gardner Denver Schopfheim GmbH

Roggenbachstr. 58
79650 Schopfheim · Germany
Tel. +49 7622 392-0
Fax +49 7622 392-300

Gardner Denver Deutschland GmbH

Industriestr. 26
97616 Bad Neustadt · Germany
Tel. +49 9771 6888-0
Fax +49 9771 6888-4000