







G-BH7

2BH7 220 ATEX - Version

Performance curve for Vacuum pump

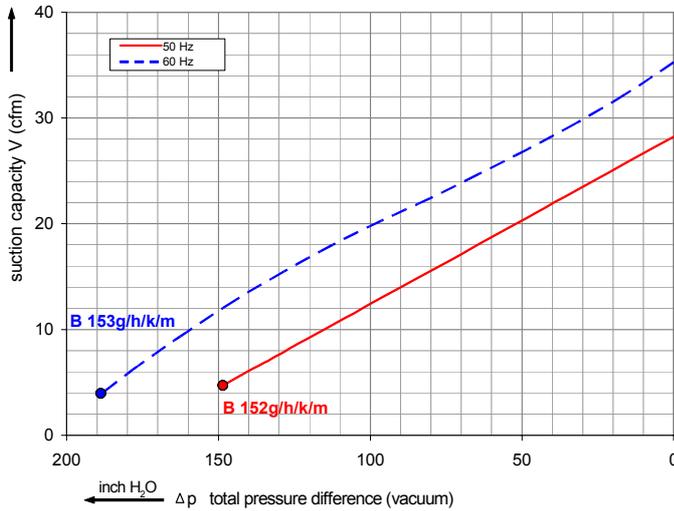

Performance curve for Compressor

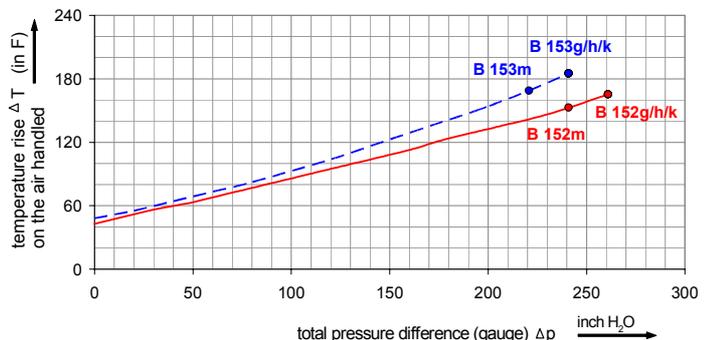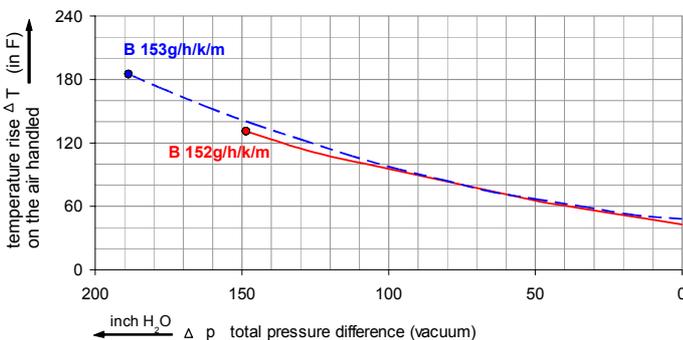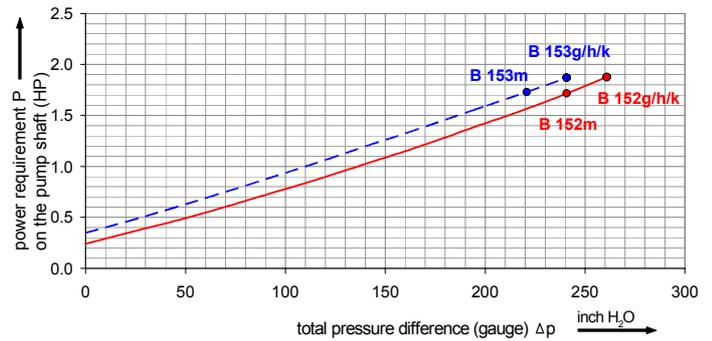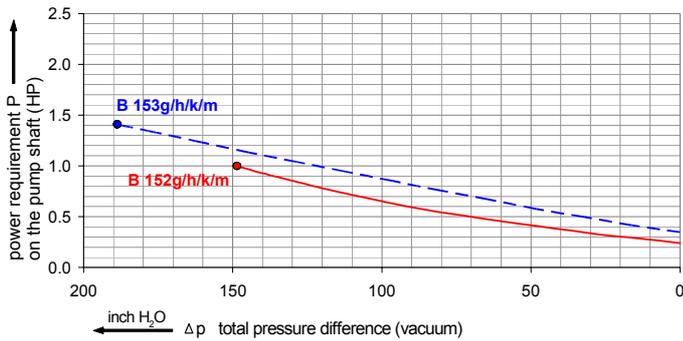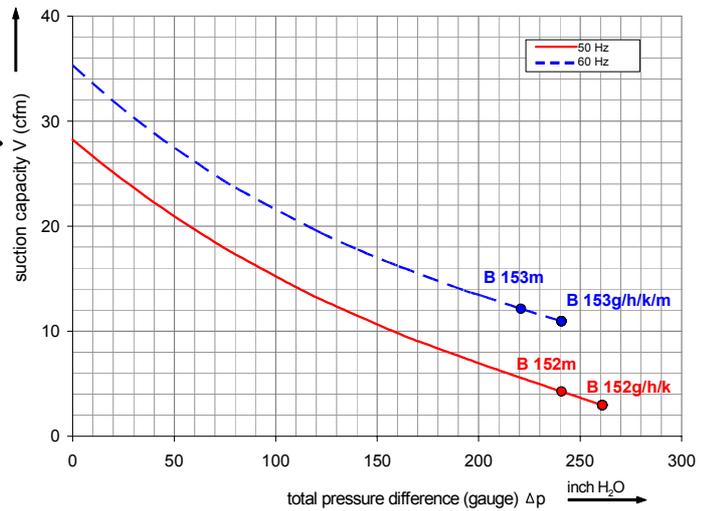

The performance curves are based on air at a temperature of 59 F and an atmospheric pressure of 401.53 inch H₂O with a tolerance of +/- 10 %. The total pressure differences are valid for suction and ambient temperatures up to 77 F. For other conditions please confer with us.

Each G-BH7 type can be applied both as vacuum pump and compressor in continuous operation over the total stated performance curve range. Blowers with ATEX 94/9 EG are available for the category 3D, 3G, 3/2D as well as 3/2G. The motors are available as standard for the input voltage of 50 and 60 Hz and for protection category IP 55 (IP 65 for category 3/2D). For the category 3/2G are only available blowers with the input voltage 50 and 60 Hz, respectively.

Selection and ordering data

Type 2BH7 220

Curve No.	Order No.	Fre- quency	Rated power	Input voltage	Input current	Permissible total differential pressure ²⁾		Sound pressure level ³⁾	Weight ca.
						Vacuum inch H2O	Compressor inch H2O		
		Hz	HP	V	A			dB(A)	lbs

ATEX-Category: 3D (Order-Option M35)

3~ 50/60 Hz, IP55, insulation material class F, temperature class T3

B 152g	2BH7220-0AD51-7-Z	50	2.0	230D	400Y	5.65D	3.25Y	-149	261	58	62
B 153g	2BH7220-0AD51-7-Z	60	2.35		460Y		3.2 Y	-189	241	62	62

ATEX-Category: 3G (Order-Option: M72)

3~ 50/60 Hz, IP55, insulation material class F, temperature class T3

B 152h	2BH7220-0AD51-7-Z	50	2.0	230D	400Y	5.65D	3.25Y	-149	261	58	62
B 153h	2BH7220-0AD51-7-Z	60	2.35		460Y		3.2 Y	-189	241	62	62

ATEX-Category: 3/2D (Order-Option: M34)

3~ 50/60 Hz, IP65, insulation material class F, temperature class T3

B 152k	2BH7220-0AD51-7-Z	50	2.0	230D	400Y	5.65D	3.25Y	-149	261	58	62
B 153k	2BH7220-0AD51-7-Z	60	2.35		460Y		3.2 Y	-189	241	62	62


ATEX-Category: 3/2G (Order-Option: M71)

3~ 50 Hz, IP55, insulation material class F, temperature class T3

B 152m	2BH7220-0AD51-7-Z	50	1.74	230D	400Y	5.0 D	2.9 Y	-149	241	58	62
--------	-------------------	----	------	------	------	-------	-------	------	-----	----	----

3~ 60 Hz, IP55, insulation material class F, temperature class T3

B 153m	2BH7220-0AG51-7-Z	60	1.74		460Y		2.64Y	-189	221	62	62
--------	-------------------	----	------	--	------	--	-------	------	-----	----	----

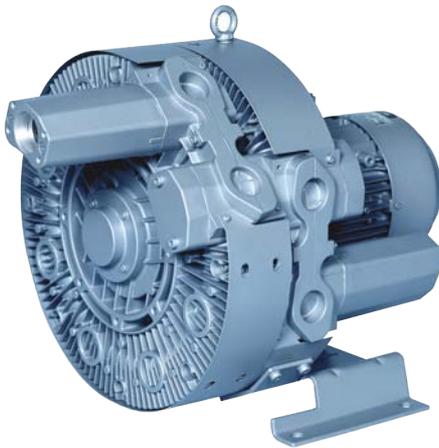

Other voltage ranges

2BH7220-0A . -Z

50Hz 60Hz



3~ ATEX

Category 3D, 3G and 3/2D

230 V D / 400 V Y	460 V Y	D 1
500 V D	575 V D	D 5
400 V D / 690 V Y	460 V D	D 6

Category 3/2G

230 V D / 400 V Y	---	D 1
500 V D	---	D 5
400 V D / 690 V Y	---	D 6
---	460 V Y	G 1
---	575 V D	G 5
---	460 V D	G 6

Further voltage range on request; please quote in plain text.

All G-BH7 achieve the standards and norms of the low voltage directive 72/23/EWG, rotating electrotechnical motor EN 60034-1-34, electromagnetic compatibility (EMC) DIN EN 61000-3-6/-4.

- 2) Relief-valve are available for limiting differential pressure.
- 3) Measuring-surface sound-pressure level acc. to DIN EN 21680, measured at a distance of 3.28 ft. The pump is throttled to an average suction pressure, a hose is connected to the discharge side (vacuum pump) / suction side (compressor), but is not fitted with relief valves.

The motors are designed according to the DIN EN 60 034 / DIN IEC 34-1 and temperature class F.

For the three phase machines the tolerances are +/- 10 % for fixed voltage. The frequency tolerance is maximum +/- 2 %.

Changes in particular the quoted performance curve, datas and weights without prior notice. The figures are without obligations.

Gardner Denver

Elmo Rietschle is a brand of the
Gardner Denver Blower Division

info@de.gardnerdenver.com
www.gd-elmorietschle.com

Gardner Denver Schopfheim GmbH

Roggenbachstr. 58
79650 Schopfheim · Germany
Tel. +49 7622 392-0
Fax +49 7622 392-300

Gardner Denver Deutschland GmbH

Industriestr. 26
97616 Bad Neustadt · Germany
Tel. +49 9771 6888-0
Fax +49 9771 6888-4000