







G-BH7

Performance curve for Vacuum pump

2BH7 210

ATEX - Version

Performance curve for Compressor

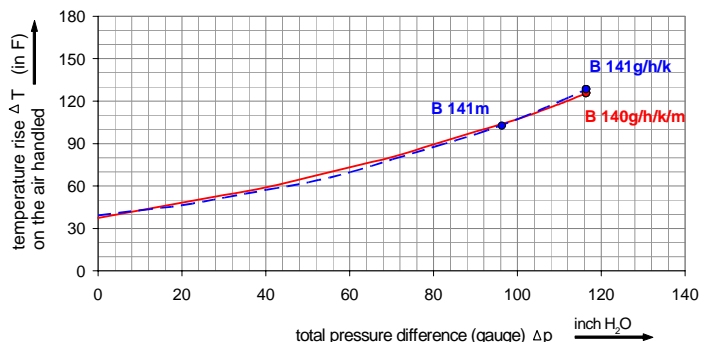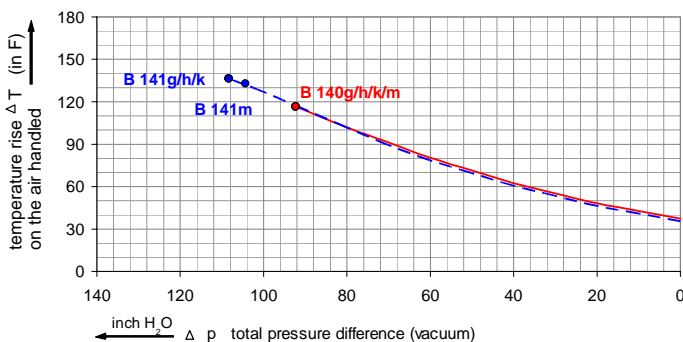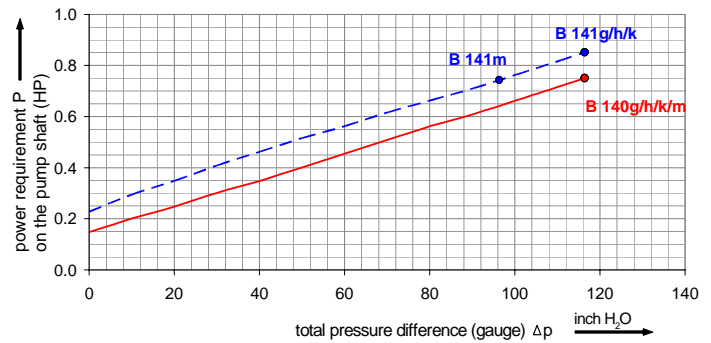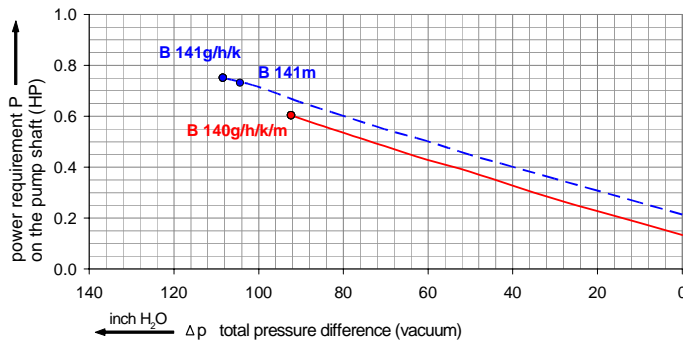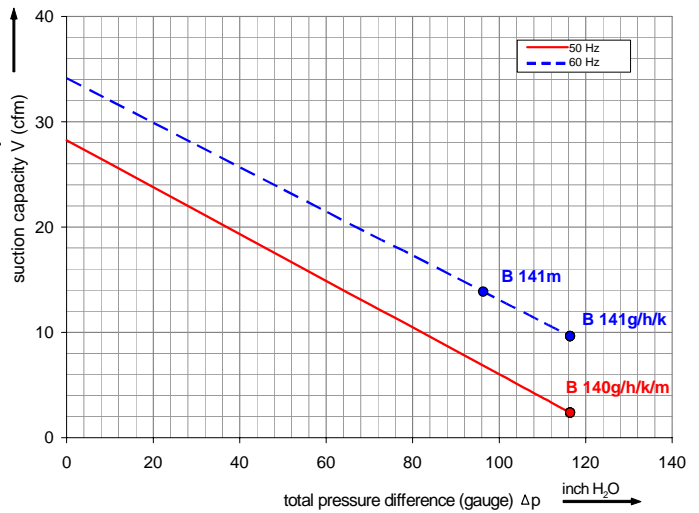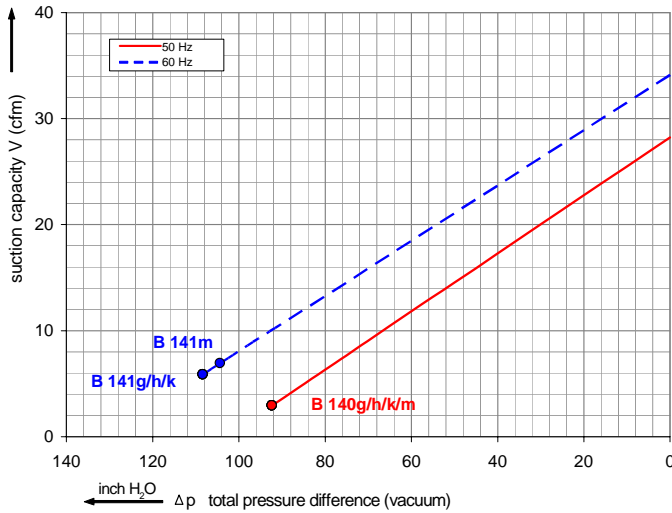

The performance curves are based on air at a temperature of 59 F and an atmospheric pressure of 401.53 inch H₂O with a tolerance of +/- 10 %. The total pressure differences are valid for suction and ambient temperatures up to 77 F. For other conditions please confer with us.

Each G-BH7 type can be applied both as vacuum pump and compressor in continuous operation over the total stated performance curve range. Blowers with ATEX 94/9 EG are available for the category 3D, 3G, 3/2D as well as 3/2G. The motors are available as standard for the input voltage of 50 and 60 Hz and for protection category IP 55 (IP 65 for category 3/2D). For the category 3/2G are only available blowers with the input voltage 50 and 60 Hz, respectively.

Selection and ordering data

Type 2BH7 210

Curve No.	Order No.	Frequency	Rated power	Input voltage	Input current	Permissible total differential pressure ²⁾		Sound pressure level ³⁾	Weight ca.
						Vacuum inch H2O	Compressor inch H2O		
		Hz	HP	V	A			dB(A)	lbs

ATEX-Category: 3D (Order-Option M35)

3- 50/60 Hz, IP55, insulation material class F, temperature class T3

B 140g	2BH7210-0AD11-7-Z	50	0.74	230D	400Y	2.36D	1.36Y	-92	116	57	35
B 141g	2BH7210-0AD11-7-Z	60	0.84		460Y		1.36Y	-108	116	62	35

ATEX-Category: 3G (Order-Option: M72)

3- 50/60 Hz, IP55, insulation material class F, temperature class T3

B 140h	2BH7210-0AD11-7-Z	50	0.74	230D	400Y	2.36D	1.36Y	-92	116	57	35
B 141h	2BH7210-0AD11-7-Z	60	0.84		460Y		1.36Y	-108	116	62	35

ATEX-Category: 3/2D (Order-Option: M34)

3- 50/60 Hz, IP65, insulation material class F, temperature class T3

B 140k	2BH7210-0AD11-7-Z	50	0.74	230D	400Y	2.36D	1.36Y	-92	116	57	35
B 141k	2BH7210-0AD11-7-Z	60	0.84		460Y		1.36Y	-108	116	62	35

ATEX-Category: 3/2G (Order-Option: M71)

3- 50 Hz, IP55, insulation material class F, temperature class T3

B 140m	2BH7210-0AD11-7-Z	50	0.74	230D	400Y	2.43D	1.4 Y	-92	116	57	37
--------	-------------------	----	------	------	------	-------	-------	-----	-----	----	----

3- 60 Hz, IP55, insulation material class F, temperature class T3

B 141m	2BH7210-0AG11-7-Z	60	0.74		460Y		1.27Y	-104	96	62	37
--------	-------------------	----	------	--	------	--	-------	------	----	----	----



All G-BH7 achieve the standards and norms of the low voltage directive 72/23/EWG, rotating electrotechnical motor EN 60034-1-34, electromagnetic compatibility (EMC) DIN EN 61000-3-6/-4.

- ²⁾ Relief-valve are available for limiting differential pressure.
³⁾ Measuring-surface sound-pressure level acc. to DIN EN 21680, measured at a distance of 3.28 ft. The pump is throttled to an average suction pressure, a hose is connected to the discharge side (vacuum pump) / suction side (compressor), but is not fitted with relief valves.

Other voltage ranges

2BH7210-0A . -Z

50Hz 60Hz



3- ATEX

Category 3D, 3G and 3/2D

230 V D / 400 V Y	460 V Y	D 1
500 V D	575 V D	D 5
400 V D / 690 V Y	460 V D	D 6

Category 3/2G

230 V D / 400 V Y	---	D 1
500 V D	---	D 5
400 V D / 690 V Y	---	D 6
---	460 V Y	G 1
---	575 V D	G 5
---	460 V D	G 6

Further voltage range on request; please quote in plain text.

The motors are designed according to the DIN EN 60 034 / DIN IEC 34-1 and temperature class F.

For the three phase machines the tolerances are +/- 10 % for fixed voltage. The frequency tolerance is maximum +/- 2 %.

Changes in particular the quoted performance curve, datas and weights without prior notice. The figures are without obligations.

Gardner Denver

Elmo Rietschle is a brand of the
Gardner Denver Blower Division

info@de.gardnerdenver.com
www.gd-elmorietschle.com

Gardner Denver Schopfheim GmbH

Roggenbachstr. 58
79650 Schopfheim · Germany

Tel. +49 7622 392-0
Fax +49 7622 392-300

Gardner Denver Deutschland GmbH

Industriestr. 26
97616 Bad Neustadt · Germany

Tel. +49 9771 6888-0
Fax +49 9771 6888-4000