


# G-BH7






Performance curve for Vacuum pump

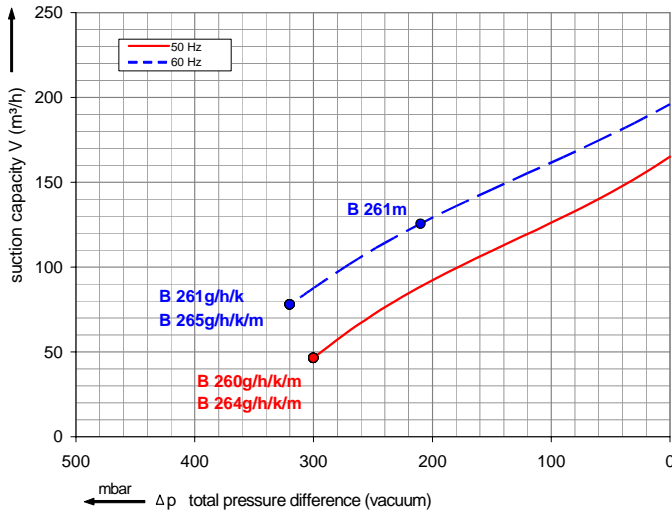

# 2BH7 610

ATEX - Version

Performance curve for Compressor

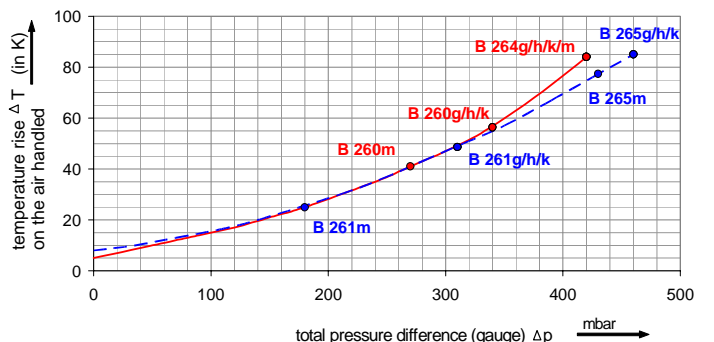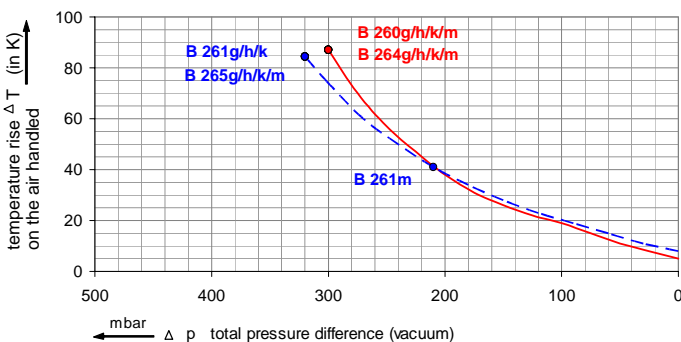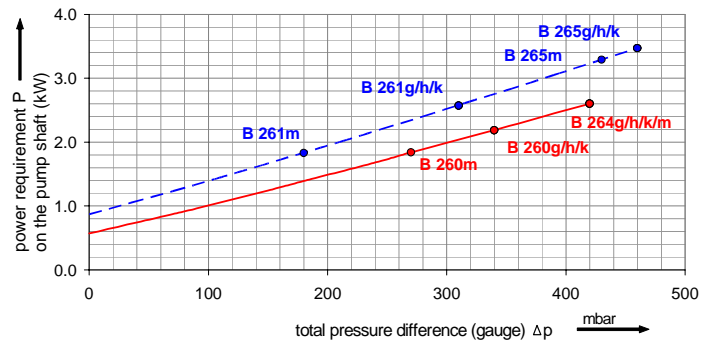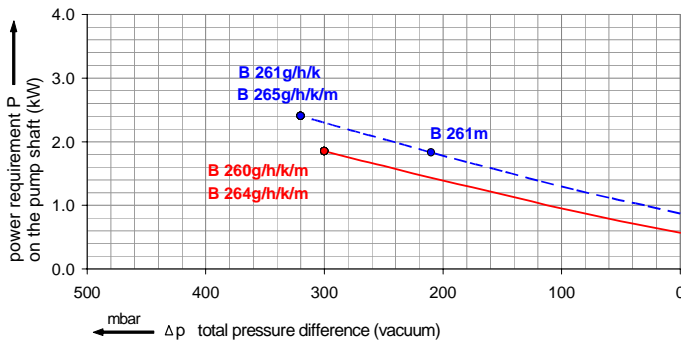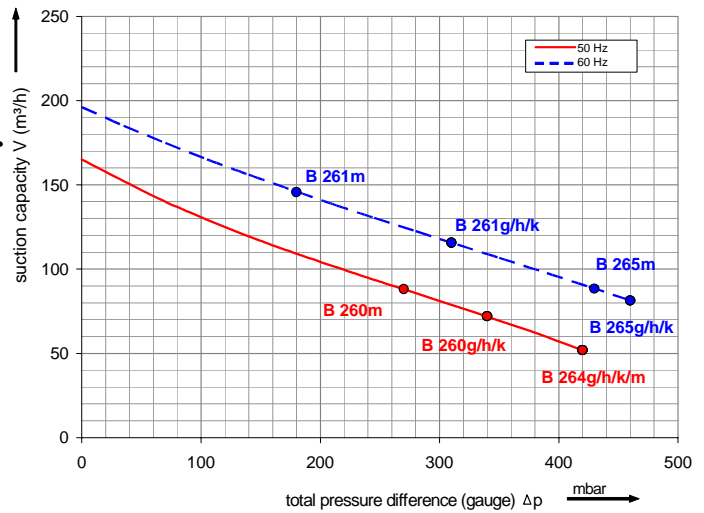

The performance curves are based on air at a temperature of 15 °C and an atmospheric pressure of 1013 mbar with a tolerance of +/- 10 %. The total pressure differences are valid for suction and ambient temperatures up to 25 °C. For other conditions please confer with us.

Each G-BH7 type can be applied both as vacuum pump and compressor in continuous operation over the total stated performance curve range. Blowers with ATEX 94/9 EG are available for the category 3D, 3G, 3/2D as well as 3/2G. The motors are available as standard for the input voltage of 50 and 60 Hz and for protection category IP 55 (IP 65 for category 3/2D). For the category 3/2G are only available blowers with the input voltage 50 and 60 Hz, respectively.

## Selection and ordering data

### Type 2BH7 610

Curve No.	Order No.	Fre- quency	Rated power	Input voltage	Input current	Permissible total differential pressure <sup>2)</sup>		Sound pressure level <sup>3)</sup>	Weight ca.
						Vacuum mbar	Compressor mbar		
		Hz	kW	V	A			dB(A)	kg

### ATEX-Category: 3D (Order-Option M35)

3~ 50/60 Hz, IP55, insulation material class F, temperature class T3

B 260g	2BH7610-0AD11-8-Z	50	2.2	230D	400Y	7.9D	4.55Y	-300	340	65	32
B 261g	2BH7610-0AD11-8-Z	60	2.55		460Y		4.5 Y	-320	310	71	32
B 264g	2BH7610-0AD46-8-Z	50	4.0	400D	690Y	7.8D	4.5 Y	-300	420	66	46
B 265g	2BH7610-0AD46-8-Z	60	4.6	460D		7.6D		-320	460	72	46

### ATEX-Category: 3G (Order-Option: M72)

3~ 50/60 Hz, IP55, insulation material class F, temperature class T3

B 260h	2BH7610-0AD11-8-Z	50	2.2	230D	400Y	7.9D	4.55Y	-300	340	65	32
B 261h	2BH7610-0AD11-8-Z	60	2.55		460Y		4.5 Y	-320	310	71	32
B 264h	2BH7610-0AD46-8-Z	50	4.0	400D	690Y	7.8D	4.5 Y	-300	420	66	46
B 265h	2BH7610-0AD46-8-Z	60	4.6	460D		7.6D		-320	460	72	46

### ATEX-Category: 3/2D (Order-Option: M34)

3~ 50/60 Hz, IP65, insulation material class F, temperature class T3

B 260k	2BH7610-0AD11-8-Z	50	2.2	230D	400Y	7.9D	4.55Y	-300	340	65	32
B 261k	2BH7610-0AD11-8-Z	60	2.55		460Y		4.5 Y	-320	310	71	32
B 264k	2BH7610-0AD46-8-Z	50	4.0	400D	690Y	7.8D	4.5 Y	-300	420	66	46
B 265k	2BH7610-0AD46-8-Z	60	4.6	460D		7.6D		-320	460	72	46


### ATEX-Category: 3/2G (Order-Option: M71)

3~ 50 Hz, IP55, insulation material class F, temperature class T3

B 260m	2BH7610-0AD11-8-Z	50	1.85	230D	400Y	6.8D	3.95Y	-300	270	65	32
B 264m	2BH7610-0AD41-8-Z	50	3.3	230D	400Y	10.7D	6.7 Y	-300	420	66	44

3~ 60 Hz, IP55, insulation material class F, temperature class T3

B 261m	2BH7610-0AG11-8-Z	60	1.85		460Y		3.48Y	-210	180	71	32
B 265m	2BH7610-0AG41-8-Z	60	3.3		460Y		6.1 Y	-320	430	72	44

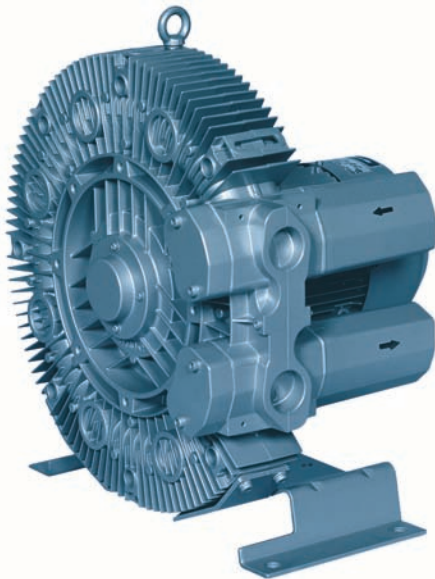

### Other voltage ranges

2BH7610-0A  .  -Z

50Hz 60Hz

3~ ATEX

#### Category 3D, 3G and 3/2D

230 V D / 400 V Y	460 V Y	D 1
500 V D	575 V D	D 5
400 V D / 690 V Y	460 V D	D 6

#### Category 3/2G

230 V D / 400 V Y	---	D 1
500 V D	---	D 5
400 V D / 690 V Y	---	D 6
---	460 V Y	G 1
---	575 V D	G 5
---	460 V D	G 6

Further voltage range on request; please quote in plain text.

All G-BH7 achieve the standards and norms of the low voltage directive 72/23/EWG, rotating electrotechnical motor EN 60034-1-34, electromagnetic compatibility (EMC) DIN EN 61000-3/-6/-4.

<sup>2)</sup> Relief-valve are available for limiting differential pressure.

<sup>3)</sup> Measuring-surface sound-pressure level acc. to DIN EN 21680, measured at a distance of 1 m. The pump is throttled to an average suction pressure, a hose is connected to the discharge side (vacuum pump) / suction side (compressor), but is not fitted with relief valves.

The motors are designed according to the DIN EN 60 034 / DIN IEC 34-1 and temperature class F.

For the three phase machines the tolerances are +/- 10 % for fixed voltage.

The frequency tolerance is maximum +/- 2 %.

Changes in particular the quoted performance curve, datas and weights without prior notice. The figures are without obligations

**Gardner  
Denver**

Elmo Rietschle is a brand of the  
Gardner Denver Blower Division

info@de.gardnerdenver.com  
www.gd-elmorietschle.com

Gardner Denver Schopfheim GmbH

Roggenbachstr. 58  
79650 Schopfheim · Germany

Tel. +49 7622 392-0  
Fax +49 7622 392-300

Gardner Denver Deutschland GmbH

Industriestr. 26  
97616 Bad Neustadt · Germany

Tel. +49 9771 6888-0  
Fax +49 9771 6888-4000