





**Elmo
Rietschle**
A Gardner Denver Product

G-BH7

Data sheet 2BH7 620-0A


Side channel blower



Performance curves

Vacuum operation

Compressor operation

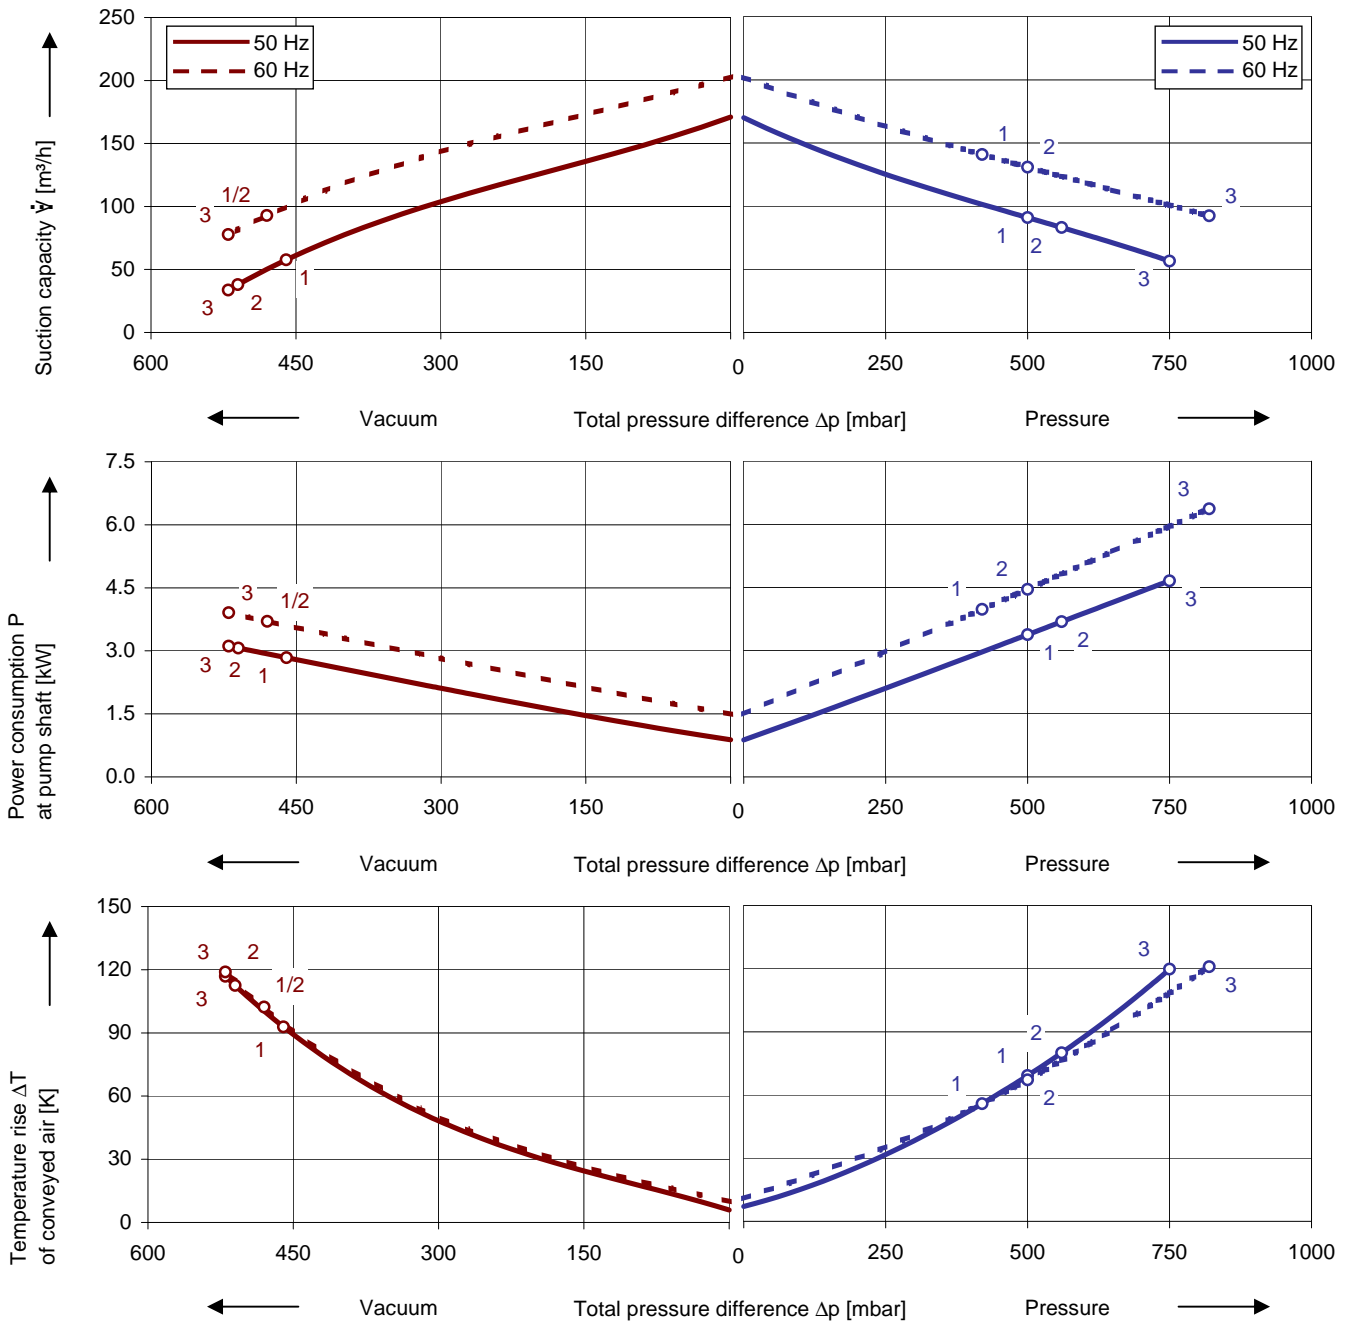

The performance curves are based on air at a temperature of 15 °C and an atmospheric pressure of 1013 mbar with a tolerance of ± 10 %. The total pressure differences are valid for suction and ambient temperature up to 25 °C. For other conditions please get in touch with us.

Every G-BH pump can be used both as vacuum pump and compressor in continuous operation over the total performance curve range. The motors are available as standard in protection category IP 55 and insulation class F. The vacuum pumps / compressors are UL and CSA approved.

Selection and ordering data

Type 2BH7 620-0A

No.	Fre- quency	Rated			Max. differential pressure ²⁾		Sound pressure level ³⁾	Weight Approx.	Order No.
		Voltage ¹⁾	Current	Power	Vacuum	Pressure			
		Hz	V	A	kW	mbar			
3- 50/60 Hz, IP55, Insulation material class F, UL 507 and CSA 22.2 No 113 (certificate number E225239)									
1	50	200 - 240 Δ / 345 - 415 Y	13.0 Δ / 7.5 Y	3.3	-460	500	67	50	2BH7620-0AH36-8
	60	220 - 275 Δ / 380 - 480 Y	13.8 Δ / 8.0 Y	3.8	-480	420	71		
2	50	200 - 240 Δ / 345 - 415 Y	14.0 Δ / 8.1 Y	4.0	-510	560	67	58	2BH7620-0AH46-8
	60	220 - 275 Δ / 380 - 480 Y	15.0 Δ / 8.6 Y	4.6	-480	500	71		
3	50	345 - 415 Δ	11.5 Δ	5.5	-520	750	68	70	2BH7620-0AH57-8
	60	380 - 480 Δ	12.0 Δ	6.3	-520	820	72		
3- 50/60 Hz, IP55, Insulation material class F, UL 507 and CSA 22.2 No 113 (certificate number E225239)									
1	50	500 Δ	5.4 Δ	3.3	-460	500	67	50	2BH7620-0AC35-8
	60	575 Δ	5.4 Δ	3.8	-480	420	71		
2	50	500 Δ	Δ	4.0	-510	560	67	58	2BH7620-0AC45-8
	60	575 Δ	Δ	4.6	-480	500	71		
3	50	500 Δ	9.3 Δ	5.5	-520	750	68	70	2BH7620-0AC55-8
	60	575 Δ	9.3 Δ	6.3	-520	820	72		

1) In case of frequency converter operation the standard motor insulation system is suitable for converter input voltages up to 460 V.

2) Relief valves available for limiting differential pressure.

3) Measuring surface sound pressure level acc. to EN ISO 3744, measured with an equivalent unit at a distance of 1 m. The pump is throttled to an average suction pressure, with piping connected, but no relief valves fitted, tolerance ± 3 dB (A).

All G-BH fulfil the 2006/42/EC (machinery) and 2006/95/EC (low voltage) directives and the EN 60034-1 norm "Rotating electrical machines".

The motors comply with EN 60 034-1 / -2 / -30 (IEC 60034) and thermal class F.

For three phase motors tolerances are +/-10% for fixed voltage motors and +/-5% for voltage range motors. Single phase machines are designed with a +/- 5% tolerance.

The frequency tolerance is +/- 2 % maximum.

Andere Spannungen

50 Hz	50 Hz Spannungsbereich	60 Hz Spannungsbereich	86 Hz (5000 1/min)	2BH7...-.. □ . □
3~				
-----	185 - 225 V Δ / 320 - 390 V Y	200 - 240 V Δ / 345 - 415 V Y	-----	H 1
-----	200 - 240 V Δ / 345 - 415 V Y	220 - 275 V Δ / 380 - 480 V Y	380 V Δ	H 6
-----	345 - 415 V Δ	380 - 480 V Δ	-----	H 7
-----	500 V Δ	575 V Δ	-----	C 5
IE2 3~⁵⁾	3~⁵⁾			
200 V Δ / 345 V Y	180 - 240 V Δ / 310 - 415 V Y	200 - 275 V Δ / 345 - 480 V Y	-----	P 1
500 V Δ	450 - 550 V Δ	520 - 600 V Δ	-----	P 5
230 V Δ / 400 V Y	200 - 260 V Δ / 350 - 450 V Y	230 - 290 V Δ / 400 - 500 V Y	400 V Δ	P 6
400 V Δ / 690 V Y	350 - 450 V Δ / 610 - 725 V Y	400 - 500 V Δ / 690 - 725 V Y	-----	P 7

5) Bei Einsatz von Energiesparmotoren können sich die Leistungsdaten ändern. Bitte beachten Sie die entsprechenden Datenblätter.

Changes in particular of the quoted performance curve, data and weights may occur without prior notice. The data given do not constitute an obligation from our side to deliver as shown.

Gardner Denver

Elmo Rietschle is a brand of Gardner
Denver's Industrial Products Group
and part of Blower Operations

er.de@gardnerdenver.com
www.gd-elmorietschle.com

Gardner Denver Schopfheim GmbH

Roggenbachstraße 58
79650 Schopfheim - Germany

Tel.: +49 7622 392-0
Fax: +49 7622 392-300

Gardner Denver Deutschland GmbH

Industriestraße 26
97616 Bad Neustadt - Germany

Tel.: +49 9771 6888-0
Fax: +49 9771 6888-4000